

# Kitty Mac Fresh Air Screens Company

4010 West 86<sup>th</sup> Street, Suite D Indianapolis, IN 46268

Telephone - 1-888-549-0783 Fax - 1-888-549-0784

Email: [info@freshairscreens.com](mailto:info@freshairscreens.com) Internet: [www.freshairscreens.com](http://www.freshairscreens.com)

## CENTER ZIPPER ROPE & PULL - INSTALLATION INSTRUCTIONS


### Tools and supplies required for installation of your Fresh Air Screen®

<i>ITEMS INCLUDED</i>	<i>ITEMS NOT INCLUDED</i>
Roll of Self Adhesive Hook/Loop	Hammer
Mounting Brackets (4)	Hacksaw
Eyelets (6)	Step Ladder
Cords (4) different lengths	3/4" plastic conduit or galvanized pipe
Cord Cleat (2)	

***PLEASE NOTE - ROPE AND PULL SCREENS DO NOT HAVE STRAPS ACROSS THE TOP OF THE SCREEN BECAUSE THE CORDS HOLD THE SCREEN UP, THEREFORE, THERE IS NO NEED FOR STRAPS.***

**Step 1** - Install and align the self adhesive hook and loop strips on both door jambs, about 1 inch in front (street side) of the door stops/weather strips. Then add the hook and loop strip to the header, so that it allows a smooth surface edge with both door jamb strips.

**Step 2** - Starting at either upper corner, attach the *Fresh Air Screen®* to the hook and loop strip which is mounted on the header. Then attach the *Fresh Air Screen®* to the hook and loop strips that are mounted on either of the door jambs of the garage door opening.

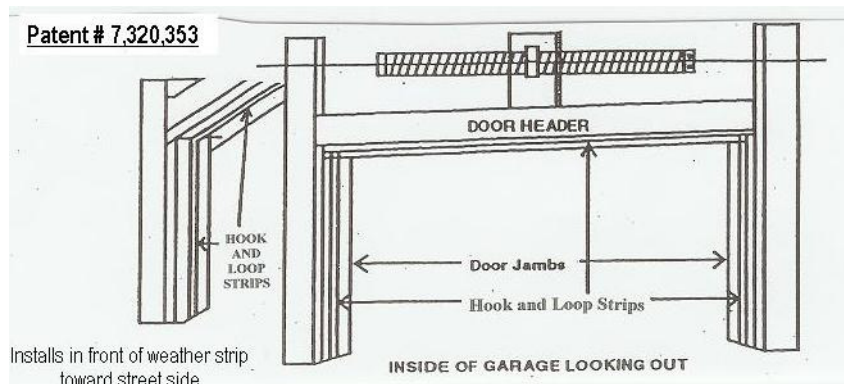

**Step 3** - All of the enclosed eyelets go into the header, on the garage side of your screen approximately 1 inch from the screen. Eyelets 1 and 2 go into the header, 6 inches either side of the center zipper. (See drawing on reverse side) The 3<sup>rd</sup> and 4<sup>th</sup> eyelets go 12 inches in, from either end of the header. The 5<sup>th</sup> and 6<sup>th</sup> eyelets go into the header about 6 inches in, from each end of the header.

**Step 4** - Attach the brackets to the header, on the street side of the screen, across from eyelets 1, 2, 3 and 4 that have already been installed in the previous step. All enclosed cords have a ball or knot on one end of it. This is the end that goes into the bracket that attaches to the header. Attach the longest cord (two enclosed) into the brackets (putting the ball/knot into the bracket) to the header on the street side of the screen, across from eyelets 1 and 2. Attach the short cord (two enclosed) into the brackets (putting the ball/knot into the bracket) to the header on the street side of the screen, across from eyelets 3 and 4.

**Step 5** - Next, run the cords down and under the screen and then back up and through the eyelets across from the brackets. Run both cords (on each side of center zipper) through eyelet 5 or 6. About 5 feet up from the floor attach enclosed cleat (one for each side) to the left and right door jambs between the garage door and the screen, directly under eyelets 5 and 6. This will allow you to wrap the cords around the cleats, (when rolling the screen up) so that either screen can be held to whatever height you desire. Tie the cords together, (WHILE THE SCREEN IS FULLY DOWN) about 12 inches below the cleats and cut off the excess cord, beyond the 12 inches. There could be quite a bit of excess cord, certainly on the smaller size screens because we use the same cords on all widths of screens.


**Step 6** - In the screen bag at the bottom of the screen, slide a 3/4 inch plastic conduit (you can buy at most retailers) into the bag. The 3/4 inch conduit usually comes in 8 feet lengths and depending on the size of your screen; you may need to purchase two of them. Cut off the excess pipe with a hacksaw so that the pipe stops at the inside edges of the side and center zippers.

By pulling the 2 cords through eyelets 5 or 6 at the same time, one half of the screen will roll up. Wrap the cords around the cleat to secure the screen at whatever height desired - from 1 foot to completely rolled up - the choice is yours!

PLEASE NOTE: ALL EYELETS ARE INSTALLED ON THE GARAGE SIDE OF THE SCREEN

EYELETS 1 and 2 - place 1 on each side, 6 inches in from the center zipper  
EYELETS 3 and 4 - place 1 on each side, 12 inches in from the outside zipper  
EYELETS 5 and 6 - place 1 on each side, 6 inches in from the outside zipper

**CORD CLEATS** - place 5 feet up from the floor

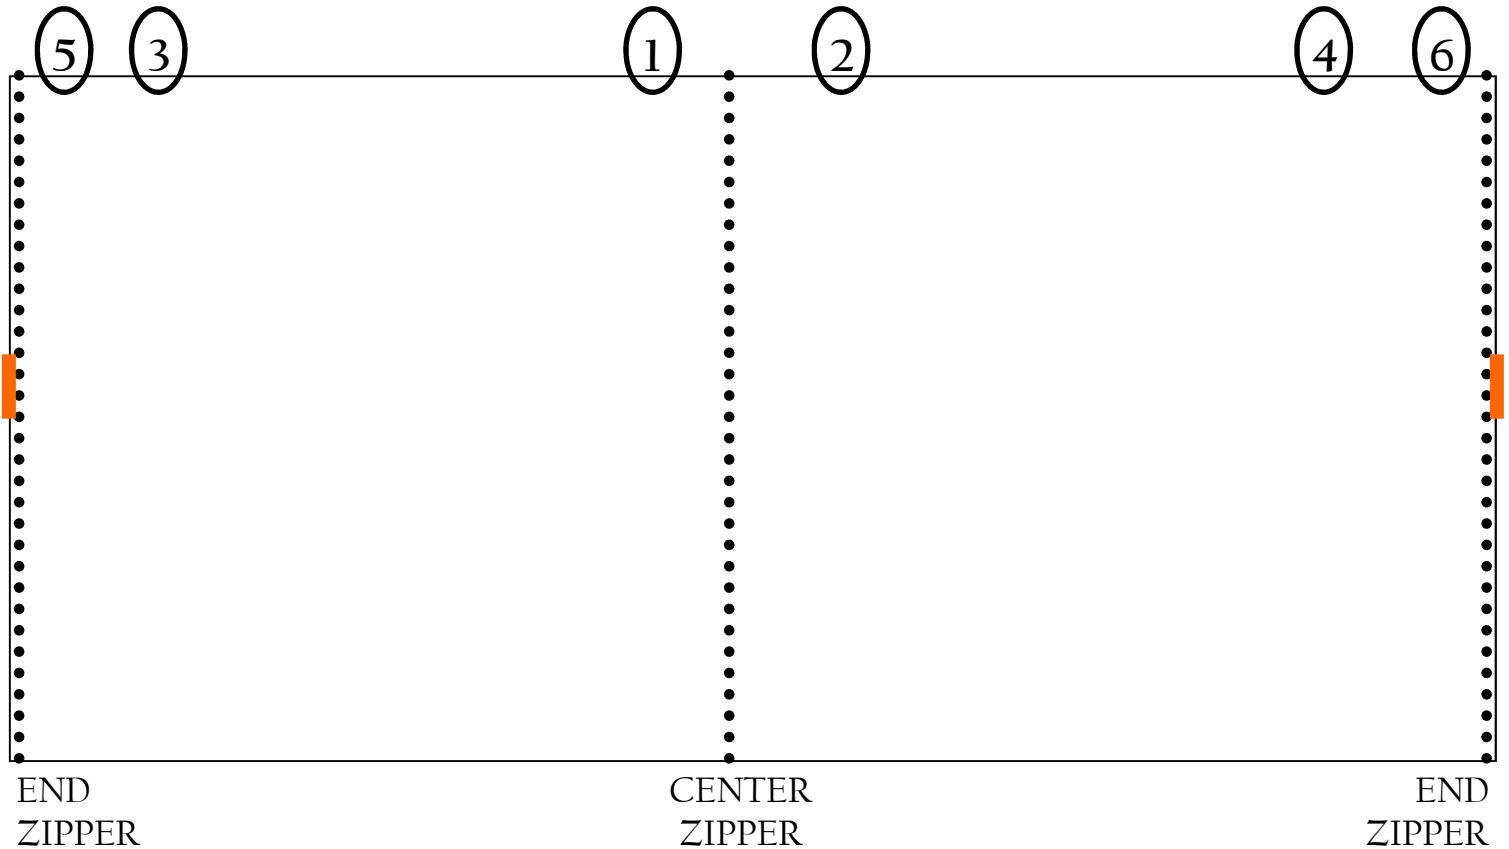

**PLEASE NOTE:**

THIS INSTALLATION WILL ALLOW THE SCREEN TO ROLL UP  
MUCH LIKE A BAMBOO SHADE.

PROUDLY MADE IN THE USA!